
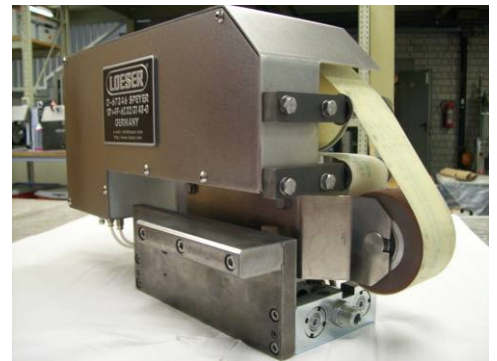


Superfinisher Type SF 106 NG

for finest finishing of cylindrical workpieces

- Device built for the operation with lapping and micro finishing films up to **50 mm belt width**
- can be mounted on a lathe
- Pressure of contact roll pneumatically and precisely adjustable
- Cross oscillation infinitely variable from 0 - 3,000 strokes per minute
- Stroke of oscillation 3 mm standard
- Manually centering of the film
- Film advance variable from 1 - 26 cm/min.
- Main voltage 230 Volt
- Air pressure 6 bar
- Pressure max. 25 kp

Accessories: 1 contact roll complete with axle and bearing
hardness can be chosen: 40, 60, 80 and 95° Shore

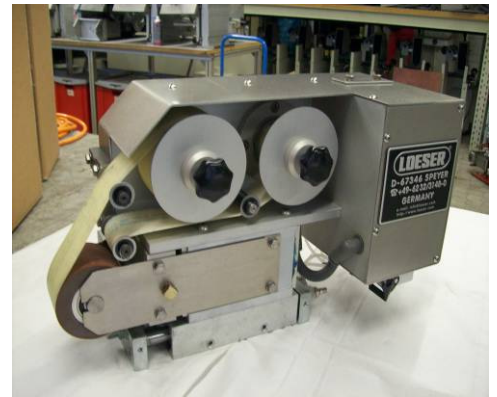

Approx. dimensions: length 480 mm, width 200 mm, height 270 mm, weight 20 kg